

Archipello.®

Tree Ring - Corten Installation Guide.



Overview:

The Archipello Tree Ring in Corten is available in various diameters and heights to suit the needs of your project.

The tree ring is supplied in one piece with a separate corten steel stake. The stake is installed over the internal join using the supplied self-tapping screws before being driven into the ground to securely anchor the tree ring.

This guide provides a clear, step-by-step method to ensure a professional-quality installation.

Materials & equipment required:

- Self-tapping screws x4 (supplied)
- Drill bit (supplied)
- Cordless drill/impact driver
- Rubber mallet
- Spade or trenching shovel (optional)
- Tape measure (optional)

1. Prepare the Area

- Remove any mulch, bark, grass, and weeds around the tree.
- Position the tree ring to check placement and trunk clearance.
- Mark and measure the installation area.

2. Dig a Shallow Trench (if required)


- Match the trench to the tree ring diameter.
- Adjust trench depth to achieve the desired finished height.

3. Position the Tree Ring and Stake

- Place the tree ring around the tree in its final position.
- Place the corten steel stake on the inside, aligning it with the fixing holes.
- Use a rubber mallet to drive the stake in firmly. Leave the correct height exposed so the fixing holes line up.

4. Assemble the Tree Ring

- Using a drill or impact driver with the supplied bit and self-tapping screws, secure the tree ring to the stake through the pre-drilled holes.
- Ensure each screw is fully tightened and stable.

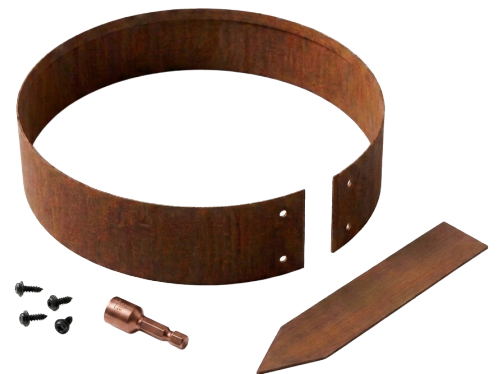

5. Level the Tree Ring

- Gently tap around the perimeter with a rubber mallet.
- Check it sits evenly and level before finishing.

6. Backfill and Finish

- Fill the inside with your chosen mulch, bark, or decorative finish.
- Leave a small gap around the trunk for airflow.

Installation Tips:

1. Ensure adequate clearance between the tree trunk and the inside of the ring to allow for future growth.
2. Always use a rubber mallet to install the tree ring. Avoid striking the corten steel directly with a metal hammer, as this may damage the finish.
3. Check that the tree ring is level before backfilling for the best finished appearance.

Archipello. Elements are available exclusively through Advance Landscape Systems.

0800 600 789

archipello@advancelandscape.co.nz

www.advancelandscape.co.nz/archipello