



Pond Liners

Installation Guide

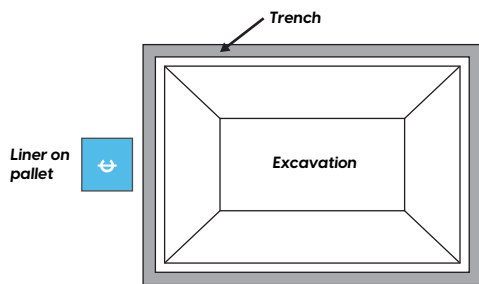


Step 1

Place pallet with c (centre mark) facing the centre of the short side of the hole, as per the diagram. Remove strapping and packaging.

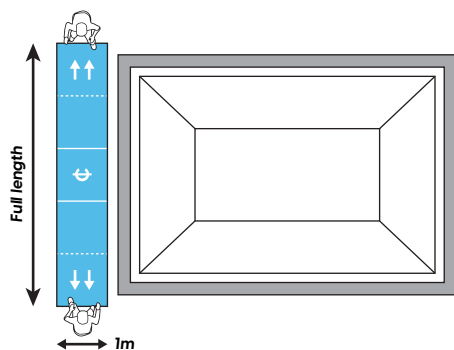

Step 2


As per direction of arrows on liner, pull out side wings to full length until they can go no further. The liner is now approximately 1 metre wide.

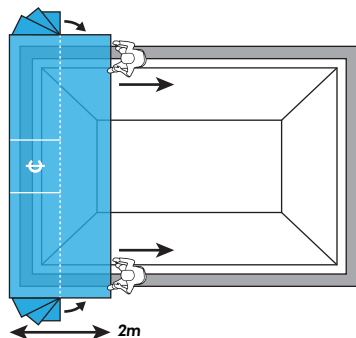

Step 3


Liner now needs to be folded out to 2 metre* width. Fold back each fold individually, until the pulling edge is exposed with directional arrows showing. Liner is now approximately 2 metres wide.

*Please note that where custom sizes are used, the recommended sizes on this installation guide will not apply.

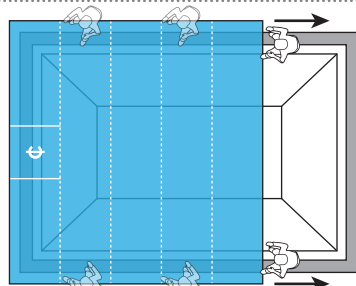

Step 4

Liner is now ready to pull out. First anchor the last sheet of liner on bottom of pallet - stand 3 people (if possible) on it so as to prevent it falling into hole. Halve your man power for each side of the liner, then slowly and evenly pull liner along, with a person joining in and pulling at every second seam if possible. When you get to the far end, ensure that the liner looks evenly placed over the hole.

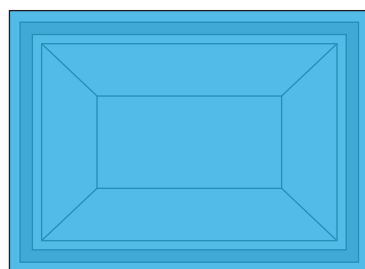

Step 5

Let the liner settle into the hole. Ensure that there is sufficient liner in all the trenches. You may have to pull to adjust the liner to fit. Backfill one short side trench, and then chase out any large folds to the corners (not always possible). Backfill all trenches lightly, sufficient enough to hold liner but also allowing it to move once filling with water. Once the liner is full of water, you can finish all necessary groundwork, filling trenches and landscaping.

For further info or questions contact our friendly team

0800 600 789

sales@advancelandscape.co.nz

www.advancelandscape.co.nz